




方向阀

导压操作方向阀，2 位 4 口附制动

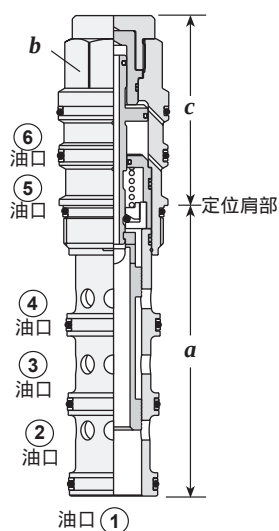

流量	(代表) 插式阀 型号	插孔	插式阀尺寸			安装 扭矩 (Nm)
			a	b	c	
40 L/min.	DCCD - XCN	T - 61A	84,8	22,2	50	40/50
80 L/min.	DCDD - XCN	T - 62A	92,2	28,6	59	60/70
160 L/min.	DCED - XCN	T - 63A	114,4	31,8	73	200/215
320 L/min.	DCFD - XCN	T - 64A	139,7	41,3	92	465/500

性能曲线

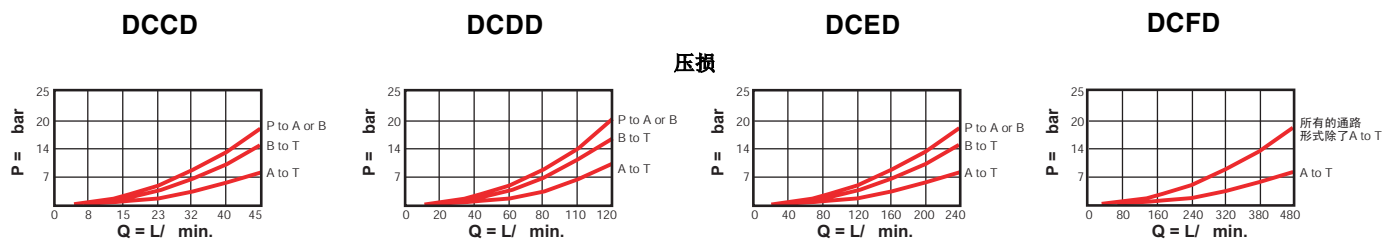

- 最大工作压力 = 350 bar
- 最大内漏量 = 2 in³/min. @ 1000 psi
- 完全切换时导压容积 = DCCD: 0,82 cc/min., DCDD: 2,0 cc/min., DCED: 5,6 cc/min., DCFD: 14,0 cc/min.
- 切换时最小导压力 = DCCD: 12 bar, DCDD: 10,5 bar, DCED, DCFD: 9 bar
- 所有油口可耐压 350 bar, 包括导压口 x 和 y

选购规格

DC * D		X * *				油封		
流量		滑栓型式 流量 (L/min.)						
C	40 L/min.	C	D	E	F	N Buna-N		
D	80 L/min.	C		42,0	83,0	170,0	340,0	V Viton
E	160 L/min.	H		38,0	76,0	151,0	302,0	
F	320 L/min.	X		49,0	151,0	302,0	567,0	

方向阀切换时 5 口和 6 口的压力差通常为 14bar